


Installation Guide

1. Sizing Tracks

Our custom, made to measure sliding wardrobe doors are all supplied with the trackset precut to length. If you purchase our fixed size sliding wardrobe doors you will need to cut the track to length depending on your opening size.

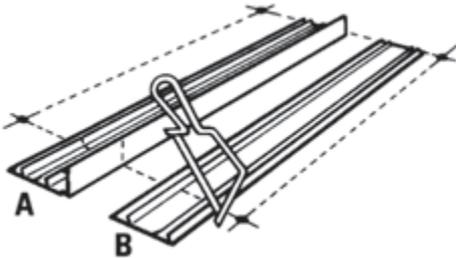


To do this measure the width of the top of your opening. Using a set square mark a straight line across the top track (A). Measure the width of the base of your opening. Mark a corresponding line across the bottom track (B). Then cut the tracks using a fine tooth hacksaw.

2. Installing Tracks

Top Track – Position track into the top of the opening. Drill and plug the header / ceiling as required and fix the top track.

Floor Track – Position the bottom track 32mm back from the front line of the top track. **We advise against fitting the bottom track direct to carpet and where possible recommend you use a length of timber on the floor – 4"x1" or similar.**

When fitting the bottom track fit one door first before screwing the track down. This will allow you to ensure the doors are plumb using a level. Once you are happy that the position of the bottom track is correct you can screw it down.

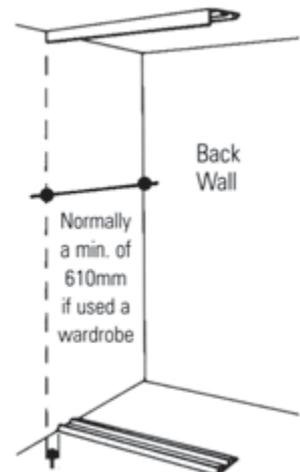

3. Positioning Doors

This is down to personal preference but below is the recommendation. (If installing panel doors in combination with mirror doors it is usual to locate the panel doors to the back and mirror doors to the front of the track).

2 doors: each door will be on a separate track.

3 doors: fit 2 doors to the back track and one to the front.

4 doors: fit the doors at either end on the back track and centre 2 on the front track etc.


5 doors: Alternate each door front and back.

4. Installing Doors

Always locate the back door first. Install doors with the bottom of the door slanting out at 15°. Lower bottom wheels into bottom track before engaging top guides.



5. Engaging Top Guide

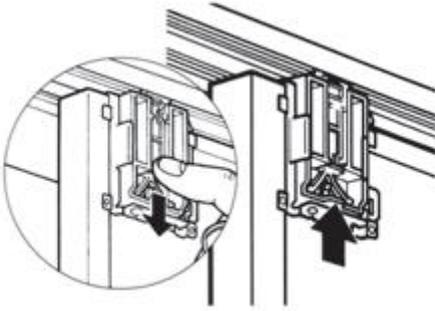


Depending on the type of top guide fitted to your door you might need to engage it into the track. (This is only necessary for standard doors – all made to measure doors come fitted with roller wheel guides at the top of the doors).

If your door has a top guide with white plastic section you need to push up the white plastic insert until it engages into the top track.

To remove door from top track pull down on top guide as shown. Guide will then disengage and you can lift the door out at a 15° angle.

6. Adjusting Doors

Align doors plumb to side walls. Adjust bottom wheels to alter the height and angle of each door. Using a pozidrive screwdriver, correct door alignment with screw adjuster attached to bottom wheel. Turn the screw clockwise to lower the door and anti-clockwise to raise the door. Plumb doors to adjacent walls and other doors by adjusting both left and right wheels up and down as required.

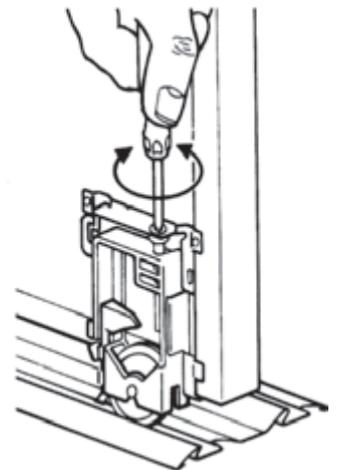

7. Engaging Anti-jump Clips

Clips must be engaged to ensure doors do not leave tracks.

- A** Rotate anti-jump clip into open position
- B** Push antijump clip fully down into track
- C** Rotate Anti-jump clip back into closed position

To disengage anti-jump clip reverse procedure. (In the unlikely event of anti-jump clip becoming detached during engagement, simply snap it back into original position shown on drawing A).

